



2011-2013 Ducati Diavel
QS4USB Installation Instructions
P/N Q120S, Q120R

WARNING!

USE ONLY IN RACE OR OTHER CLOSED COURSE APPLICATIONS AND NEVER ON PUBLIC ROADS

Z-Fi products do not meet California CARB highway requirements

Parts List:

QS4 Control Unit

QS4 Harness

Shift Switch & Mounting Hardware

Download Z-Fi Mapper Software and its Instructions from website

Scotchlok (1)

Cable Ties

USB Cable

Velcro

Swingarm Stickers




Read through all instructions before beginning installation. This is not a replacement for the ECU. This document is intended for use by qualified technicians. For more specific stock component identification and location information refer to a factory service manual.

To create the ideal map(s) we recommend using the optional Z-AFM self-tuning module

15330 Fairfield Ranch Rd., Unit E, Chino Hills, CA 91709 Phone (909) 597-8300 Fax (909)597-5580
www.Bazzaz.net

BAZZAZ HARNESS CONNECTOR IDENTIFICATION

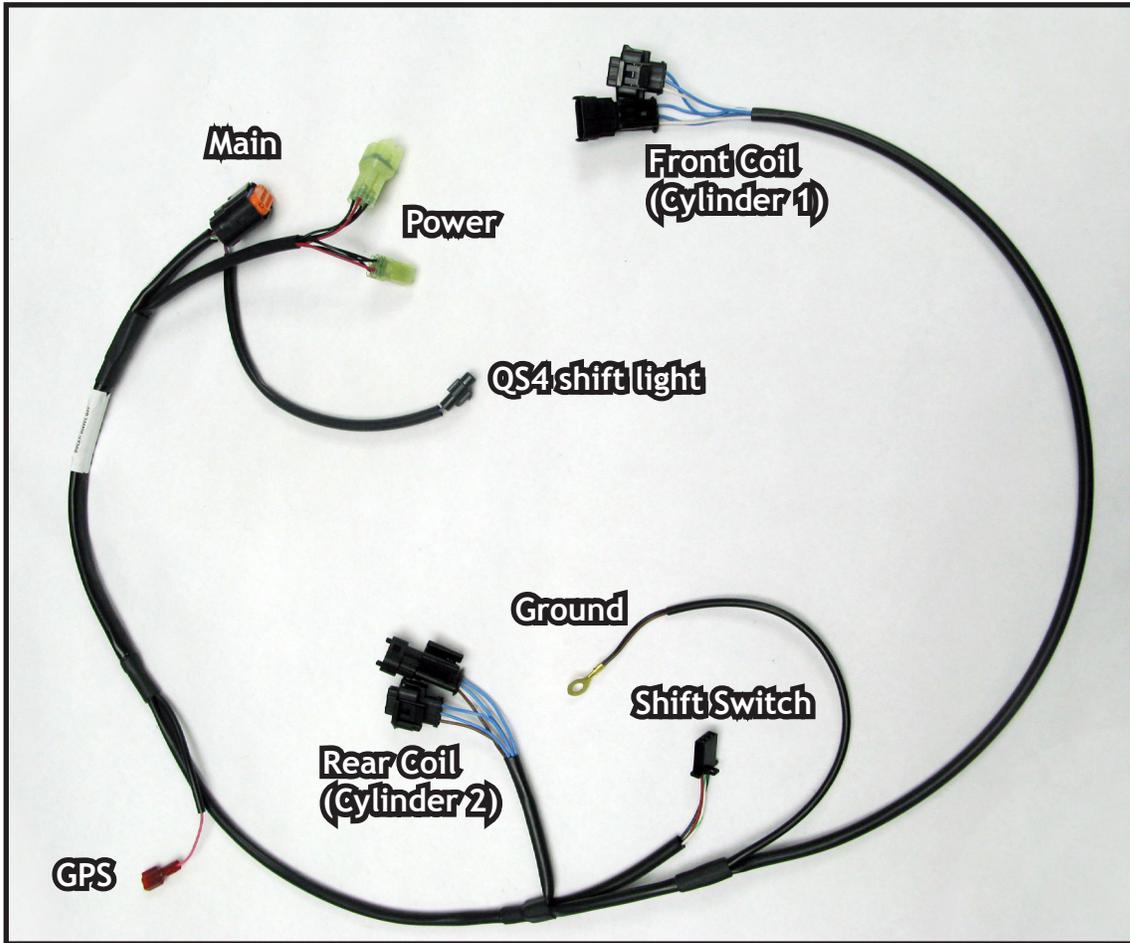

QS4 HARNESS



Rear coil


+12V Switched Power

GPS

Ground




Front coil

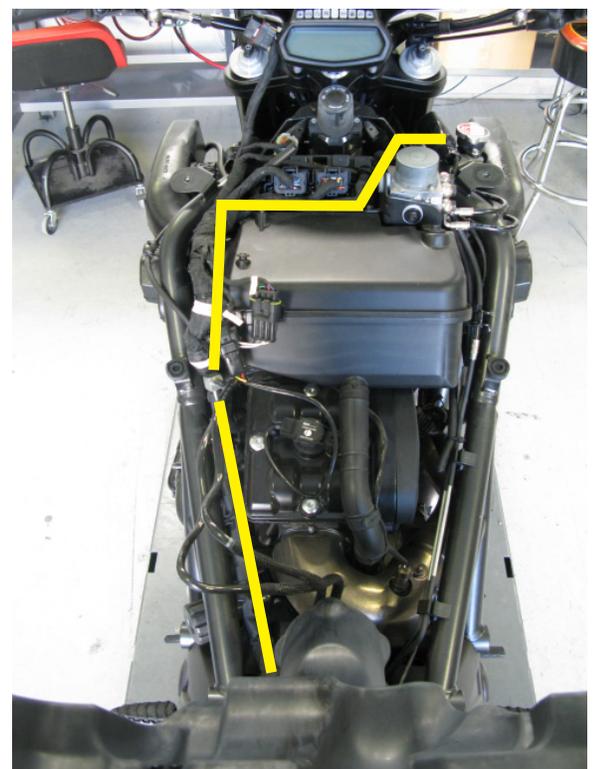


**WE STRONGLY SUGGEST THAT AN EXPERIENCED TECHNICIAN
INSTALL THIS BAZZAZ PRODUCT**

1. Begin the installation by removing the seat, all side panels, dash, tank cover, and tail tray. Unbolt the tank so it can be lifted up. Remove the air intake tubes on each side of the airbox. Next remove the outer and inner shrouds for the right side radiator.
2. You will need to unbolt everything on top of the airbox so it can shift backward. Next loosen both hose clamps on the intake boots and pull the airbox up and back so it is loose (it is still connected to the throttle cables so it cannot be removed completely).
3. Mount the control unit in the tail section of the motorcycle and connect the main connector of the Bazzaz QS4 to it. Route the QS4 harness under the left rear corner of the fuel tank.
4. Locate the tail light (clear connector) on the left side of the tail tray; disconnect this connector and plug the Bazzaz +12V switched power (orange label on lead) connectors in line between the two factory connectors.

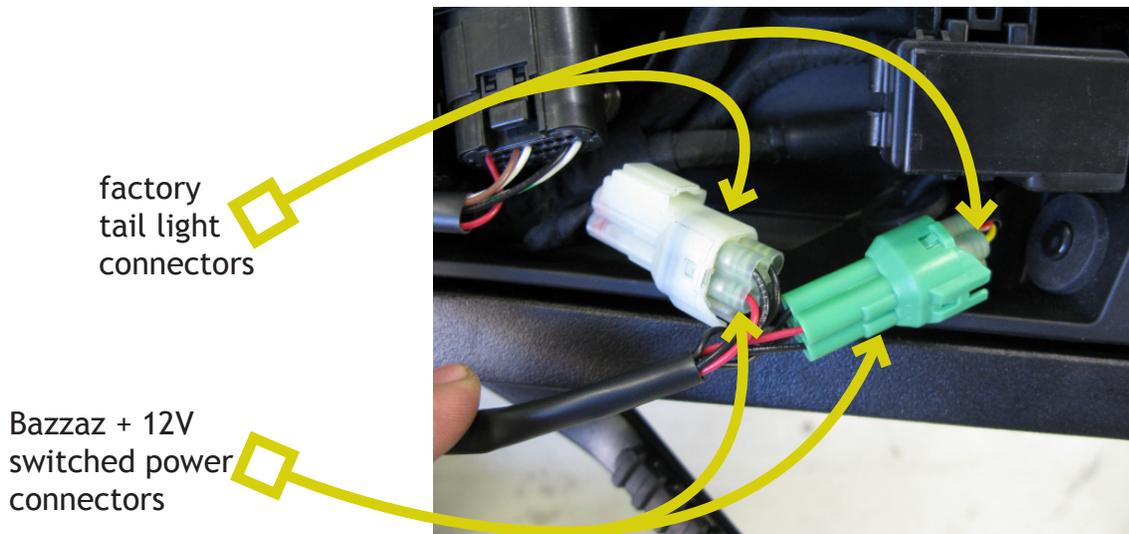

5. Locate the GPS (Gear Position Sensor) connector (small white three pin connector) near the bottom of the tank, behind the rear exhaust. Trim the wire sheathing back and crimp a supplied scotchlok onto the **yellow/green** wire of the factory GPS connector. Now insert the Bazzaz GPS connector (red connector with pink wire) into the scotchlok.

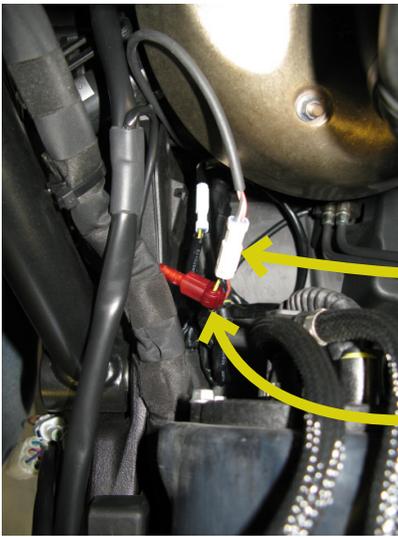


factory GPS connector

Bazzaz GPS connector


6. Continue routing the fuel harness, following along with the factory harness down the left side of the motorcycle.

7. Find a suitable engine case bolt to secure the Bazzaz ground lug to.

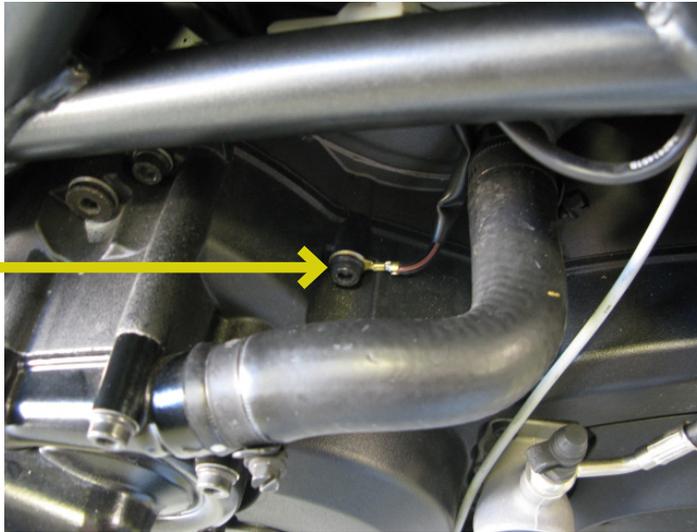


Bazzaz ground lug

8. Route the Bazzaz rear coil connectors (labeled on harness) to the factory rear coil connectors on the rear of the airbox. Disconnect the factory rear coil connectors and plug the Bazzaz rear (cylinder 2) coil connectors in line with the factory connectors.

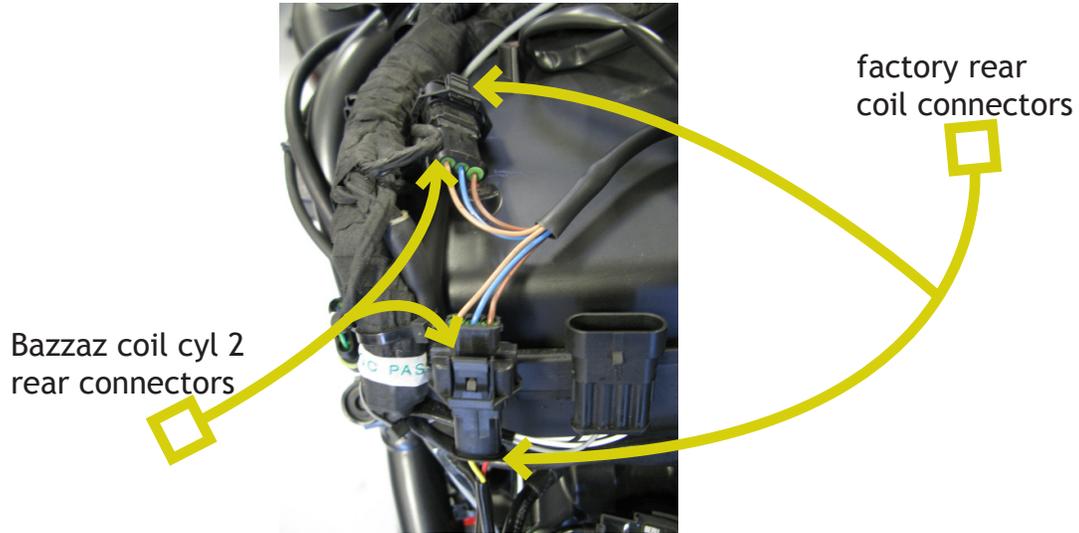

9. Route the remaining portion of the coil harness over the top of the airbox, down between the front right section of the frame. Locate the factory front coil connectors and disconnect. Plug the Bazzaz front (cylinder 1) coil connectors in line with these factory connectors as well.

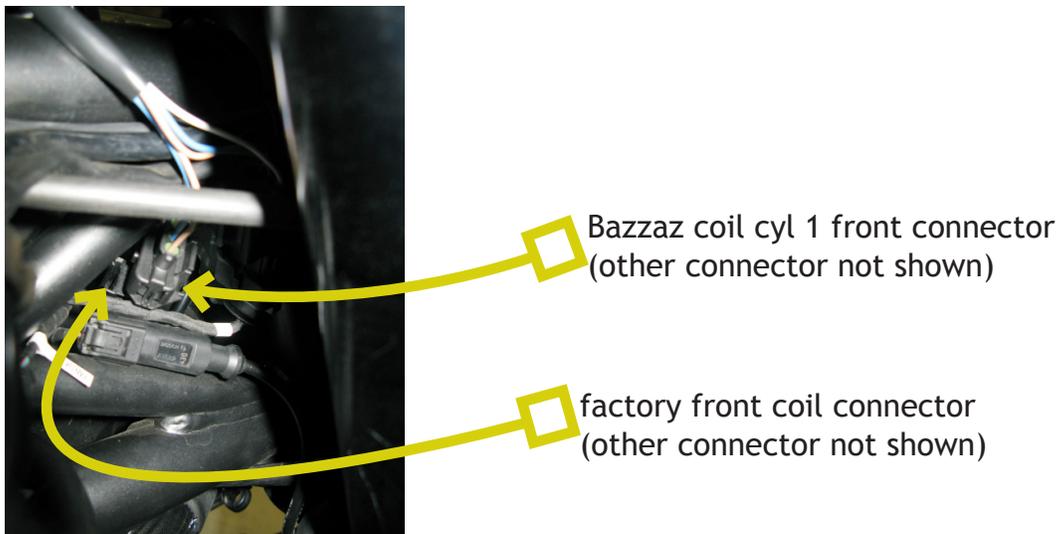

10. Now you will begin the installation of the shift switch. Remove the stock shift rod and the heim joint attached to the shift lever. Screw the shift switch into the factory heim joint on the upper shift linkage, then screw the supplied heim joint onto the shift switch to the desired length. Last, secure the heim joint to the shift rod then secure all 10mm nuts. Route the shift switch connector up to the mating connector on the Bazzaz coil harness.

Secure excess shift switch cable away from moving parts.



11. To complete the installation, use the supplied cable ties to secure the Bazzaz and factory harnesses neatly along its routing path free of any moving or hot components (which could cause damage or failure of the system). If any problem is found, please carefully follow through the installation steps again. If problem still persists, please call Bazzaz tech support department at (909) 597-8300. After it is determined that everything is correct reinstall the components removed in step one and the installation will be complete.

QS4 USB SHIFT LIGHT

Purchased separately.

79.95

Illuminates to identify pre-determined, optimal shift points. Comes pre-programmed with suggested figures that can be easily adjusted as desired.



